


Application



LD31

The general purpose LD31 submersible pressure level transmitter provides continuous level measurement up to 46' (14m) of water column with a 4-20 mA signal output. The LD31 liquid level sensor for relatively clean water, light weight oil or diluted chemical. Application examples include water wells and ponds.

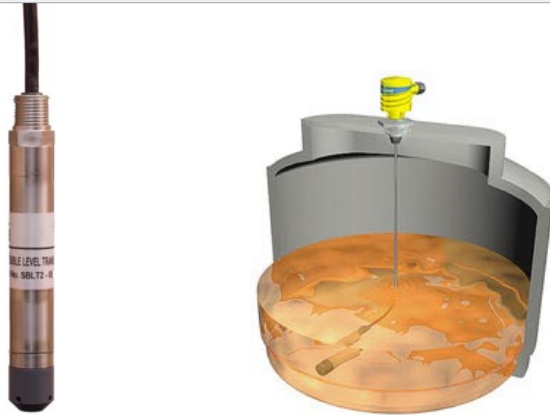


Features

- ✓ Corrosion resistant 316 SS transducer with polyurethane or ETFE cable
- ✓ Strong cable design with maintenance free breather tube and vent filter
- ✓ Automatic temperature compensation for accurate measurement

Key Benefits

- ✓ Ideal for applications with heavy foam and vapors
- ✓ Connects directly to PLC/SCADA or display
- ✓ Great for higher temperatures and installation with small access
- ✓ Great for concrete sumps with limited access


Accessories

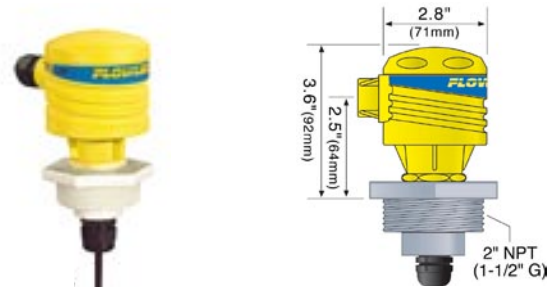

Submersible Pressure Sensor Mounting Kit w/ Junction Box

LD90-1001	Term-Strip, 2" NPT Plug, PP
LD90-1061	Term-Strip, 2" G Plug, PP
LD90-5001	Term-Strip, 2" NPT Plug, PVDF
LD90-5061	Term-Strip, 2" G Plug, PVDF

AC-DC Sensor & Indicator Power Supply

	LC95-1001	100-240 VAC, 24 VDC @ 0.60A, 35mm Rail
-------------------------------------------------------------------------------------	-----------	-------------------------------------------

Compatible Products

DataLoop™ Level Indicator



LI25

DataView™ Level Controller



LI55

Commander™ Multi-Tank Level Controller



LI90

DataPoint™ Level Controller




LC52

Specifications

Range:	-SX01: 0 to 5 psi (0.34 bar), 0 to 11' (0 to 3.4m) wc -SX11: 0 to 10 psi (0.69 bar), 0 to 23' (0 to 7m) wc -SX21: 0 to 15 psi (1.0 bar), 0 to 34' (0 to 10.4m) wc -SX31: 0 to 20 psi (1.38 bar), 0 to 46' (0 to 14m) wc
Accuracy:	± 0.25% of full scale
Configuration:	None, fixed span
Supply voltage:	13 to 30 VDC
Loop resist.:	900 Ohms @ 30 VDC
Signal output:	4-20 mA, two-wire
Process temp.:	F: 0° to 150° C: -18° to 66°
Temp. comp.:	F: 0 to 150° C: -18 to 66°
Proof pressure:	2 x full scale
Response time:	50 ms
Weight:	2.2 lb (1.0 kg)
Trans. material:	316 SS, 316L SS, Buna-N & PVC
Trans. thread:	1/2" NPT
Cable type:	2-conductor, shielded with vent tube
Cable length:	-SX01 & SX11: 40' (12.2m) -SX21 & SX31: 60' (18.3m)
Cable material:	-S1X1: Polyurethane -S2X1: ETFE
Classification:	General purpose
Compliance:	CE

Dimensions

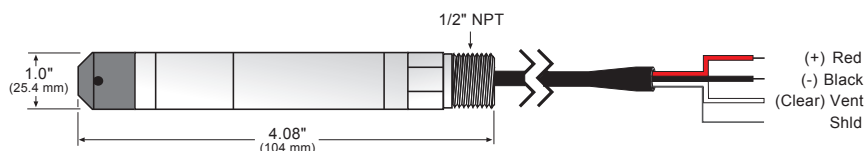

Fittings

For optimum performance, install the level sensor using the below recommended or direct equivalent fittings. For use with LD90.

	P/N	Description
	LM52-2400	3" NPT x 2" NPT (Sch. 40)
	LM52-2800	3" NPT x 2" NPT (Sch. 80)
	LM52-3800	4" NPT x 2" NPT (Sch. 80)
	LM52-2410	3" Socket x 2" NPT (Sch. 40)
	LM52-3410	4" Socket x 2" NPT (Sch. 40)
	LM52-2810	3" Socket x 2" NPT (Sch. 80)
	LM52-3810	4" Socket x 2" NPT (Sch. 80)
	LM52-2890	2" NPT Bulkhead Fitting, PVC
	LM52-2850	2" NPT Flange - 150# (Sch. 80)
	LM50-1001	2" NPT Bracket, Polypropylene

Ordering

LD31-S 1

Cable jacket (1)

- 1 Polyurethane
- 2 ETFE

Sensor range

- 0 5 psi (0.34 bar) / 11' (3.4m) wc
- 1 10 psi (0.69 bar) / 23' (7m) wc
- 2 15 psi (1.0 bar) / 34' (10.4m) wc
- 3 20 psi (1.38 bar) / 46' (14m) wc

Notes

- 1) To install the level sensor through the tank top with a compact junction box, 2" mounting plug and cable connector, order the submersible pressure sensor mounting kit.