


## Application



The general purpose guard capacitance point level switch provides reliable high or low liquid level detection of water based conductive liquids with light coating, crystallizing or scaling characteristics with a 1A relay output. Media examples include copper sulfate and brine. The RF guard circuit eliminates the coating signal path between the active and reference electrodes. The submersible polypropylene liquid level sensor is universally mounted through non-metallic tank walls or inside the tank as a high level alarm or low level alarm.

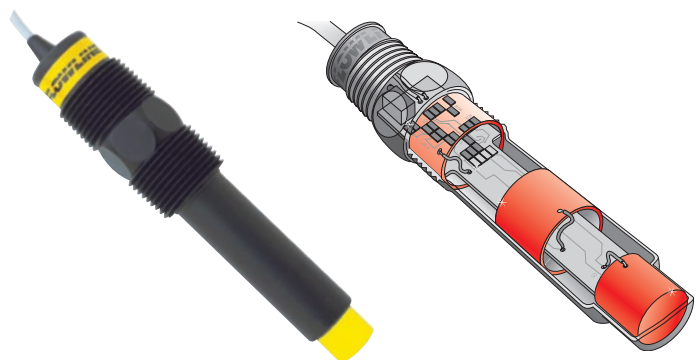

## Features

- ✓ Guard circuit optimizes performance in coating type media
- ✓ Submersible polypropylene sensor body and cable for corrosive liquids
- ✓ 60VA relay selectable NO or NC via power supply wiring polarity
- ✓ Compatible with Smart Trak and Switch-Pak installation fittings

## Key Benefits

- ✓ Ideal for side wall or top mount
- ✓ Ideal for coating liquids
- ✓ Great for waste water applications

## Compatible Products

### Switch-Pro™

#### Remote Level Controller

**LC4X**

## Application

Available in general purpose classification, the level controller is offered in three configurations for pump and valve control. The LC40 accepts one level sensor input and provides one 10A relay. The LC41 accepts two level sensor inputs and provides one latching 10A relay for automatic fill or empty control. The LC42 accepts three level sensor inputs with one latching 10A relay output for automatic fill or empty control, and a second non-latching 10A relay for high level alarm or low level alarm. For field mount installation, add a single or dual indicator NEMA box.

### Switch-Pro™

#### Compact Level Controller

**LC1X**


## Application

The general purpose level controller is offered in two configurations for pump and valve control. The LC10 accepts one level sensor input and provides one 16A relay for high level control or low level control. The LC11 accepts two level sensor inputs and provides one latching 16A relay for automatic fill or empty control. The optional flash alarm brings attention to level alarm conditions. Package this level controller with our liquid level switch sensors and fittings.

## Specifications

Orientation:	Universal
Accuracy:	± 1mm in water
Repeatability:	± 0.5mm in water
Dielectric range:	> 20 constants
Conductive range:	> 100 µ
Supply voltage:	12-36 VDC
Consumption:	25 mA maximum
Contact type:	(1) SPST relay
Contact rating:	60 VA, 1A maximum
Contact output:	Selectable NO / NC
Process temp:	F: -40° to 176° C: -40° to 80°
Pressure:	150 psi (10 bar) @ 25° C., derated @ 1.667 psi (0.113 bar) per °C. above 25° C.
Sensor rating:	NEMA 6 (IP68)
Sensor material:	Polypropylene
Cable jack. mat.:	Polypropylene
Cable type:	4-conductor, shielded #22 AWG
Cable length:	10' (3m)
Process mount:	3/4" NPT (3/4" G)
Mount. gasket:	Viton® (G version only)
Classification:	General purpose
Compliance:	CE

## Dimensions

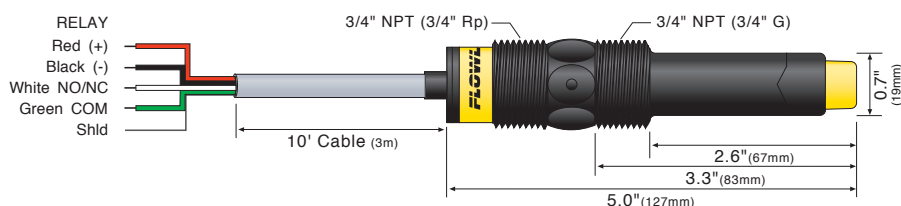

## Fittings

For optimum performance, install the level sensor using the below recommended or direct equivalent fittings.

P/N	Description
<b>Switch-Pak Single-Point Switch Fitting</b>	
LM45-7001	2" NPT Plug, 3/4" NPT Adapter & Nipple, PVC
LM45-1001	2" NPT Plug, 3/4" NPT Adapter & Nipple, PP
LM45-5001	2" NPT Plug, 3/4" NPT Adapter & Nipple, PVDF
<b>Smart Trak Multi-Point Switch Fitting</b>	
LM10-1201	2' Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1401	4' Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1601	6' Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1801	8' Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1001	10' Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1101	1m Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1301	2m Track, 2" NPT Plug, 3/4" NPT Nipple, PP
LM10-1701	3m Track, 2" NPT Plug, 3/4" NPT Nipple, PP
<b>Smart Trak Level Switch Car Kit</b>	
LM30-1001	Switch Car Kit, 3/4" NPT, Polypropylene
LM30-1061	Switch Car Kit, 3/4" Rp, Polypropylene
LM52-2890	2" NPT Bulkhead Fitting, PVC
<b>Side-Mount Bracket</b>	
LM50-1001	2" NPT Bracket, Polypropylene

## Ordering

LP15-14    5

### Process mount (1) (2)

- 0 NPT (US)  
2 G / Rp (Metric)

### Notes

- To special order a 25' (7.6m) or 50' (15.2 m) level sensor cable, place the cable length at the end of the part number (ie: LP15-1405-25'). Add \$20 for 25' (7.6m) or \$40 for 50' (15.2m) to the price.
- The metric level sensor has straight G threads on the sensing side and conical Rp threads on the cable side of the wrench flat.