

## Application



Offered in both vertical and horizontal configurations, the general purpose high-temp float level switches provide reliable liquid level detection of relatively clean water, diluted chemicals and light weight oils with a 30VA or 100VA reed switch output. Media examples include hot deionized water and cooking oil. The stainless steel liquid level sensors are mounted vertically inside the tank or horizontally through the tank wall as a high level alarm or low level alarm.



## Features

- ✓ 316 SS level sensor for high temp and pressure applications
- ✓ Dry contact reed switch selectable NO or NC via float orientation
- ✓ Offered in both vertical and horizontal mounting configurations for high or low level point detection

## Key Benefits

- ✓ Simple level switch for high temperature/pressure applications
- ✓ Switches wire directly to a PLC/SCADA or controller
- ✓ Switches can be converted in the field from NO to NC

## Compatible Products

### Switch-Pro™ Remote Level Controller



### Application

Available in general purpose classification, the level controller is offered in three configurations for pump and valve control. The LC40 accepts one level sensor input and provides one 10A relay. The LC41 accepts two level sensor inputs and provides one latching 10A relay for automatic fill or empty control. The LC42 accepts three level sensor inputs with one latching 10A relay output for automatic fill or empty control, and a second non-latching 10A relay for high level alarm or low level alarm. For field mount installation, add a single or dual indicator NEMA box.

### Switch-Pro™ Compact Level Controller




### Application

The general purpose level controller is offered in two configurations for pump and valve control. The LC10 accepts one level sensor input and provides one 16A relay for high level control or low level control. The LC11 accepts two level sensor inputs and provides one latching 16A relay for automatic fill or empty control. The optional flash alarm brings attention to level alarm conditions. Package this level controller with our liquid level switch sensors and fittings.

## Specifications

Orientation:	LV3X: ±20° vertical LH35: ±20° horizontal
Accuracy:	± 3mm in water
Repeatability:	± 1mm in water
Specific gravity:	LV3X: 0.7 minimum LH35: 0.6 minimum
Contact type:	(1) SPST reed
Contact rating:	LX35: 30 VA LV36: 100 VA
Contact output:	Selectable NO / NC
Process temp.:	F: -40° to 392° C: -40° to 200°
Pressure:	LV35: 300 psi (20.7 bar) LV36: 500 psi (34.5 bar) LH35: 300 psi (20.7 bar)
Sensor rating:	NEMA 6 (IP68)
Sensor material:	316 SS
Wire jack. mat.:	Polymeric
Wire type:	2-conductor
Wire length:	2' (61cm)
Process mount:	LV35: 1/8" NPT LV36: 1/4" NPT LH35: 1/2" NPT
Classification:	General purpose
Compliance:	CE

## Dimensions

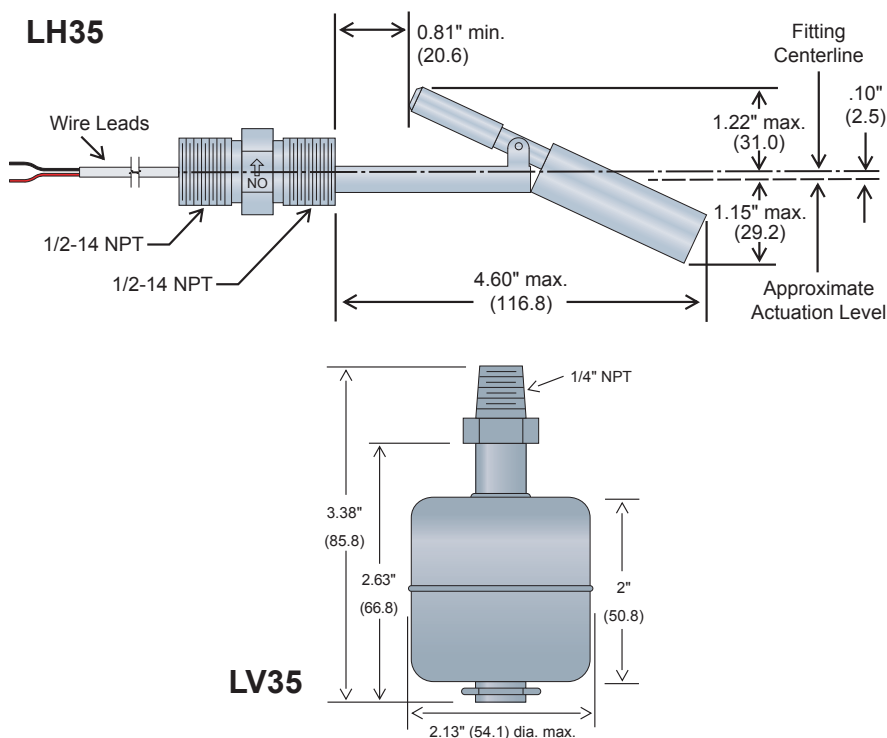

## Accessories

Protect your level controller from the elements by using the below recommended single or two indicator NEMA box.



P/N	Description
<b>Single &amp; Two Controller NEMA Box</b>	
LM94-1001	Single Controller, Windowed, 35mm Rail, PC
LM95-1001	Two Controller, Windowed, 35mm Rail, PC

## Ordering

### Vertical

#### Maximum pressure (1)

- 5 300 psi (20.7 bar)  
 6 500 psi (34.5 bar)

LV3 ☐ -5201

### Horizontal

#### Maximum pressure (1)

- 5 500 psi (34.5 bar)

LH3 ☐ -5201

## Notes

- 1) The normally open or closed contact output is selectable based on the installed orientation of the float.