
SwitchPoint

тм

Compact Relay Level Controller

Specifications

Sensor inputs:	LC05: 1-4 sensors
	LC06: 1-2 sensors
Terminal strip:	LC05: 12 pole socket
	LC06: 6 pole socket
Enclosure rating:	NEMA 4X (IP65)
Encl. material:	PP, UL94VO
Encl. mount:	1001: 3/4" NPT
	1051: 3/4" Rp
Encl. rotation:	300° swivel base
Conduit entrance:	Single, 1/2" NPT
Temp. rating:	F: -40° to 158°
	C: -40° to 70°
CE compliance:	EN 50082-2 immunity
	EN 55011 emission
	EN 61010-1 safety

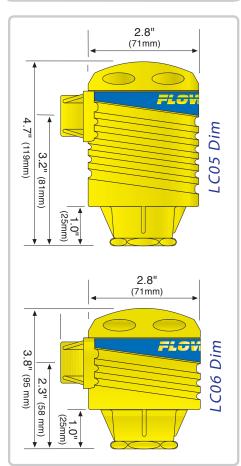



Description

Offered in small and large sizes, the accessory junction box is the ideal choice for sensor wiring and conduit termination. The junction box is universally compatible with our level switch, flow switch and fitting assembly products. The small enclosure has 6 poles and is typically applied with a single level or flow switch. The large enclosure has 12 poles for multiple level switches and is typically applied with Smart-Trak. For a low-cost pump shut off, package the large junction box with the level or flow switch of your choice. Wire the sensor contact to a high amp relay and place the relay inside the junction box. It's level made simple!


Features

- PP enclosure rated NEMA 4X with 300° conduit swivel base
- Compatible with Flowline liquid or gas flow switches and fittings
- Removable terminal strips with upper and lower screw poles
- Offered in two compact sizes for single and multi-point installations



Switch-Point

Ordering



Ordering Notes 1) For a liquid tight cable connection, order the the LM90-1001 connector.



Spec Tech Industrial 203 Vest Ave. Valley Park, MO 63088 Phone: 888 SPECTECH E-mail: sales@spectechind.com www.spectechind.com