



**Relay**

Contact Ratings  
 10 Amps @ 30VDC/240VAC  
 General Purpose  
 1.5 Amps @ 120 VAC  
 Inductive (CosØ=0.35)  
 1HP @ 240VAC Motor  
 1/2HP @ 120VAC, Motor

Specifications  
 Pick-Up Voltage:  
 75% of Rated Voltage  
 Drop-Out Voltage:  
 30% of rated AC Voltage  
 10% of rated DC Voltage

Max. Voltage:  
 110% of rated Voltage

Operating Time:  
 ≤20 milliseconds

Coil Power:  
 ≤1.6VA 50Hz  
 ≤1.5VA 60Hz  
 ≤1.0W DC

Temperature Rating:  
 -10°C to 40°C




Contact Material:  
 Silver Cadmium Oxide (AgCdO)

Contact Resistance:  
 <0.050Ohms (before use)

Minimum Operating Current:  
 5mA@24VDC

Life: Mechanical:  
 50,000,000 Operations  
 Electrical:  
 1,300,000 Operations


Ordering Information

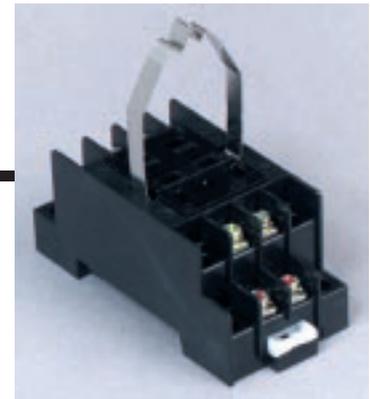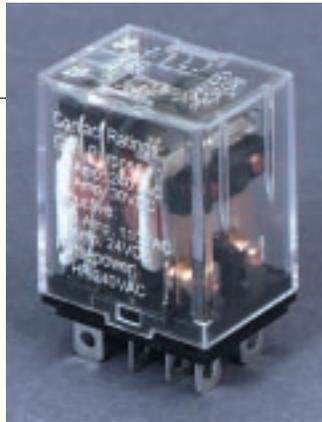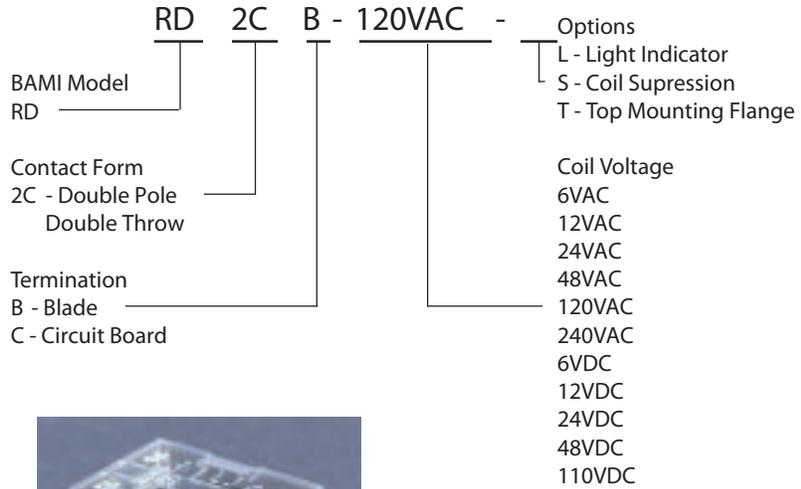


**Socket**

Specifications  
 Current Rating: 10 Amps  
 Voltage Rating: 250VAC  
 Mounting: DIN or Surface

Connections



Dimensions

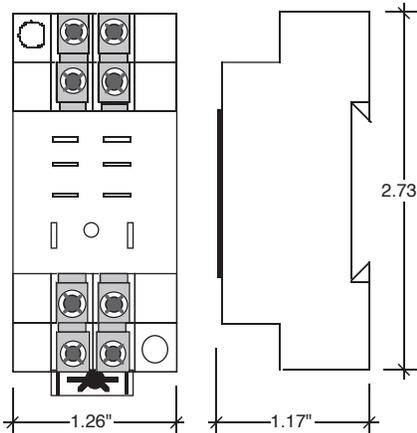

Ordering Information

