



Class 53 Master Switch

Class 53

Class 53, Furnas Brand Master Switches are used to provide single handle pilot control of hoists, cranes, oven pushers, car movers and other equipment requiring speed steps of wound rotor or direct current motors.

A special duplex control accessory is available to provide single handle control of two master controls to provide diagonal motion.

They satisfy applications requiring a definite sequence of opening and closing multiple pilot contacts.

Furnas Brand Class 53 Master Switch Standard Features include:

- Double Break Contacts
- Compact Design
- Momentary or Maintained Contacts
- UL Listed File #E22655
- CSA Certified File #LR6535

Maintained Contacts — Class 53

E84

Speeds	Contacts NO (Poles)	Contacts Closed Forward	Contacts Closed Reverse	NEMA 1 Enclosure	
				Catalog No.	Price \$
1	2	1	1	C2542	1,051.50
2	3	2	2	C2374	1,098.00
3	4	3	3	C3331	1,132.50
4	5	4	4	C3330	1,129.00
5	6	5	5	C1950	1,213.50

Momentary Contacts — Class 53

E84

Speeds	Contacts NO (Poles)	Contacts Closed Forward	Contacts Closed Reverse	NEMA 1 Enclosure	
				Catalog No.	Price \$
1	2	1	1	C2123	1,144.50
2	3	2	2	C2268	1,191.00
3	4	3	3	C2060	1,225.50
4	5	4	4	C4130	1,270.50
5	6	5	5	C1188	1,306.50

Accessories — Class 53

E84

Description	Price \$
NO and NC Contact Operated by Handle Button Add suffix B to the Catalog Number	423.
Duplex Control L3652XB Requires 2 master switches	1,314.



Replacement Part — Class 53

E89

Description	Catalog No.	Price \$
Contact Board Contacts Included	L14112	81. •

- Discount Code: Replacement Parts.



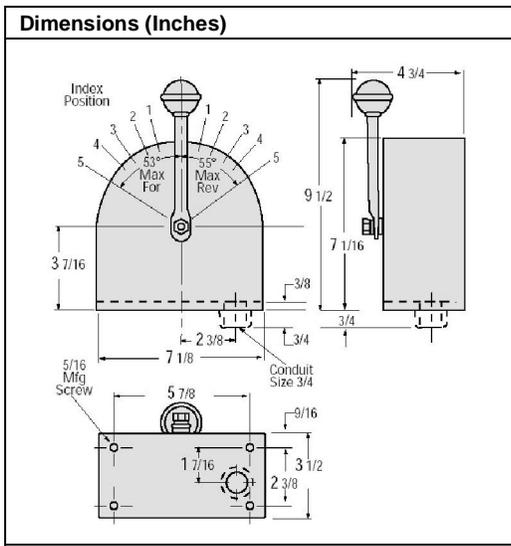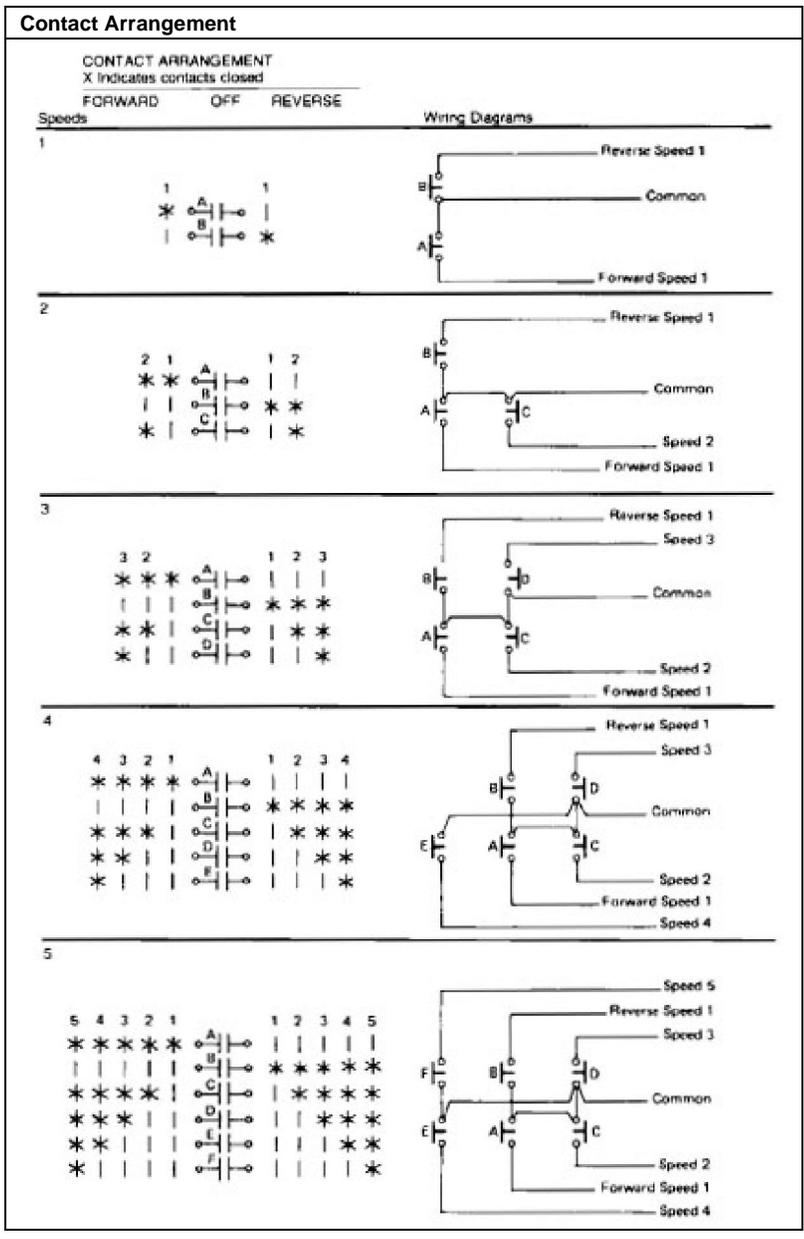

Electrical Ratings

NEMA A600 10 Continuous Amps (AC)		
Volts	Make	Break
120	60	6.0
240	30	3.0
480	15	1.5
600	12	1.2
VA	7200	720.0

NEMA A600 10 Continuous Amps (AC)		
Volts	Make	Break
125	1.10	1.10
250	0.55	0.55
301-600	0.20	0.20
VA (300 Volts or less)	138.0	138.0

